

Vibration Test System TV 50350-120



DESCRIPTION

TIRA shakers reproduce vibration environment under laboratory conditions for testing the dynamic strength and the reliability in all fields of vibration testing.

TIRA shakers are designed for long-time operation. They are distinguished by their high transverse vibration strength and high axial stiffness. The electrodynamic shaker is pivotally mounted in a rugged frame and enables the excitation in vertical and horizontal direction.

An automatic, pneumatic operated load compensation allows the realization of the nominal vibration displacement, even with heavy test loads. The frame is equipped with air isolation mounts according to standard. The transmission of vibrations onto the place of erection is reduced to a minimum; an additional foundation (seismic mass) is not required in most cases. A maintenance-free blower guarantees the cooling of the shaker. The cooling air is sucked in via a filtersystem.

TIRA shakers, amplifiers and vibration control systems represent a complete test system offering the users the possibility to establish proof of the quality of their products according to national and international standards (such as DIN, ISO, BS, MIL, IEC, ASTM).

AMPLIFIER A 1 01 1 004

KVA ratings	4200 VA
Frequency range	DC-4 kHz
Voltage, max.	105 V
Current, max.	40 A
Load resistance	2.6 Ohm
Input voltage	2.5/5/10 V
Distortion	<0.5 %
Signal to noise ratio	> 90 dB
Field voltage, max.	100/180 V
Field current, max.	6 A
Weight	225 kg (496.0 lb)
Size (WxHxD)	600 x 1800 x 800 mm (23.6 x 70.9 x 31.5 in)


TECHNICAL SPECIFICATION VIBRATION GENERATOR S 50350-120

Rated peak force (N lbf)	Sine/Random/Shock	2700/2000/4000	607/450/900
Frequency range (Hz)		DC-4000	DC-4000
Max. rated travel (mm inch)	Pk-Pk	25.4	1.0
Max. velocity (m/sec inch/sec)	Sine/Random/Shock	1.5/1.5/2.5	59/59/98
Max. acceleration (g)	Sine/Random/Shock	110/81/163	110/81/163
Max. power consumption at 400 V (kVA)		5.5	5.5
Nominal impedance (Ohm)		2	2
Suspension stiffness (N/mm lbf/inch)		22	125.6
Max. weight tested (kg lb)		25	55.1
Effective moving mass (kg lb)		2.5	5.5
Main resonance frequency (Hz)		>4000	>4000
Weight with trunnion (kg lb)		280	617.3
Stray magnetic field (mT)	without/with degauss kit	<8.5/<0.5	<8.5/<0.5
Armature (∅/mm ∅/inch)		120	4.72
Cooling (m ³ /h ft ³ /min)		200	118
Interlocks	Temperature, overtravel, airflow, overcurrent, compressed air		

PERFORMANCE DIAGRAM


System Performance TV 50350-120

Force: 2700 N max. Acceleration: 110 g max. Velocity: 1.5 m/s max. Displacement: 25,4 mm

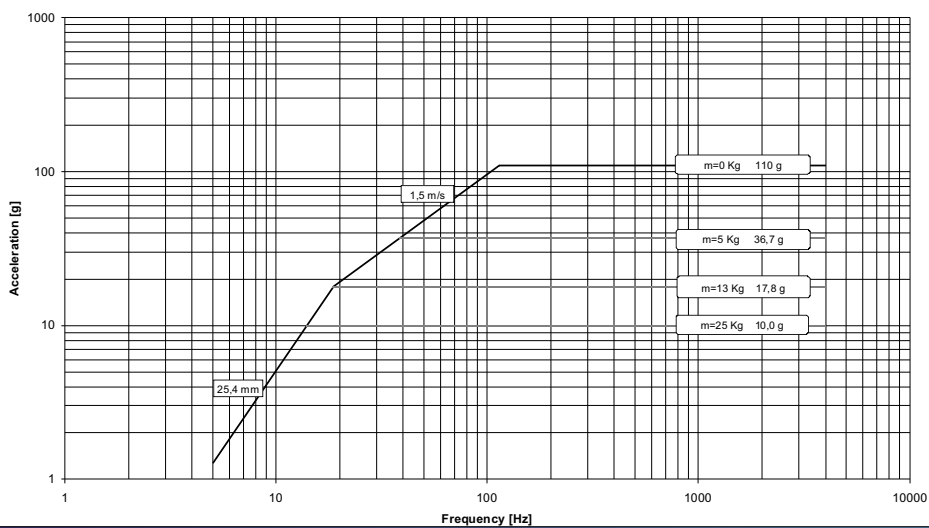

DIMENSIONS (mm)

S 50350-120 (Example drawing)

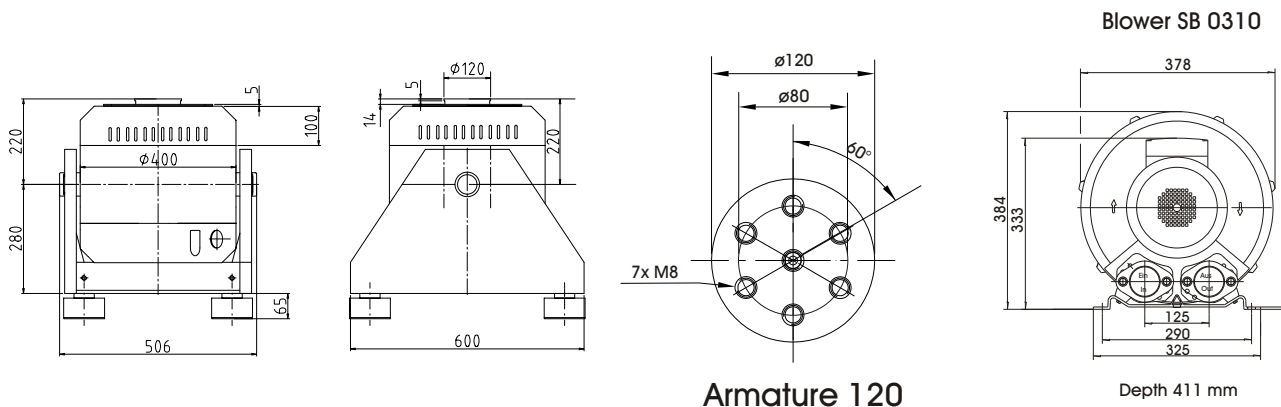

Subject to modifications

TIRA GmbH

96528 Schalkau Eisfelder Str. 23-25 Germany Tel.: +49 36766 280-0 Fax: +49 36766 280-99

Internet: www.tira-gmbh.de

e-mail: st@tira-gmbh.de